

Premium Maintenance

# UZIN Resilient Care


Ready to use resilient floor cleaner

## Description:

UZIN Resilient Care is a streak-free, pH neutral cleaner for daily cleaning and maintenance of any residential and commercial resilient floor covering.

## Suitable for:

- ▶ Resilient floor covering
- ▶ LVT/LVP (Luxury Vinyl Tile / Plank)
- ▶ Linoleum
- ▶ VCT (Vinyl Composition Tile)
- ▶ Rubber floor covering
- ▶ Natural and artificial stone
- ▶ Interior residential (apartments, houses)
- ▶ Interior commercial (offices, hospitals, schools, universities, libraries, stores, assisted living)

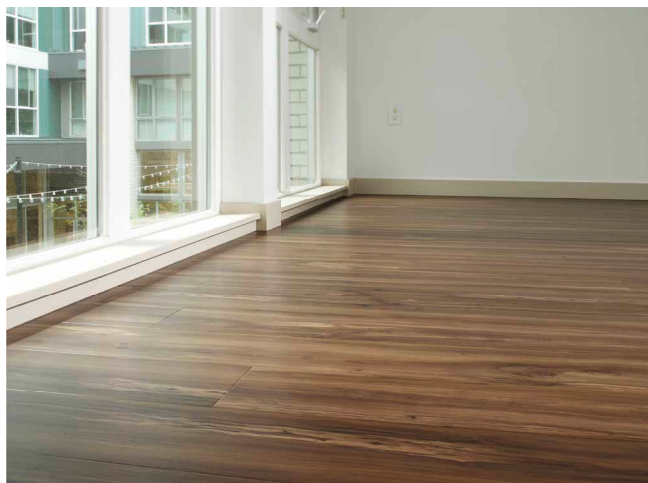

## Product benefits / properties:

UZIN Resilient Care is a premium, streak-free cleaner. Great for everyday use.

- ▶ Multipurpose/for any resilient floor covering, also for natural and artificial stone
- ▶ pH neutral – safe for all floors
- ▶ Great for daily cleaning
- ▶ One step process
- ▶ Leaves no residue

## Technical Data:

Packaging:	5 litre plastic canister 0.75 litre plastic bottle
Shelf life:	minimum 24 months
Colour:	green
Odour:	neutral
Working temperature:	16 – 24 °C
Working time:	approx. 60 minutes*
Set to traffic:	dry to touch

\*At 21 °C and 65 % relative humidity.

## Application:

- ▶ Sweep or vacuum the floor.
- ▶ Dilute UZIN Resilient Care 1 : 200 with water (50 ml : 10 litre).
- ▶ Wipe the substrate with a moist microfiber mop, e.g. RZ Folding Holder and RZ Fine-fibre Mop.
- ▶ Let the residual moisture dry, don't wipe again.

## Important notes:

- ▶ Shelf life minimum 24 months in original packaging when stored in relatively cool conditions. Protect from freezing. Carefully and tightly reseal opened packages and use the content as quickly as possible. Allow product to reach room temperature before use.

## Protection of the Workplace and the Environment:

Water based cleaner. Non-flammable. Use of barrier cream and ventilation of the work area are recommended. Observe safety information on product label as well as safety data sheet.

## Disposal:

Where possible, collect product residues and re-use. Do not allow dispersal into drains, sewers or ground. Empty, drip-free plastic containers are recyclable. Containers with liquid residue, as well as the liquid product, are classed as Special Waste. Dried product residues are classed as Construction Waste.