

# PRODUCT DATA SHEET



Premium 2 Component Coating

# UZIN Turbo Protect Plus

Heavy duty 2-component PU sealer for long term protection of resilient floor coverings

## Description:

UZIN Turbo Protect Plus is a 2-component waterborne polyurethane resilient floor coating with outstanding durability and excellent resistance to solutions of surface and hand disinfectants. It is ideal for coating new installations or existing resilient floors. For interior use only.




## Suitable for:

- ▶ Resilient floor coverings
- ▶ LVT/LVP (Luxury Vinyl Tile/Plank)
- ▶ Linoleum (with polyurethane wear layer)
- ▶ VCT (Vinyl Composition Tile)
- ▶ Rubber flooring with smoother and light structured surface
- ▶ Interior residential (apartments, houses)
- ▶ Interior commercial (offices, hospitals, schools, universities, libraries, stores, assisted living)

- ▶ Protects the substrate from materials penetrating into the floor
- ▶ For all resilient floorings (smooth and lightly embossed)
- ▶ Low cost per m<sup>2</sup>
- ▶ Reduces labour costs because of 1-coat application
- ▶ Reduces maintenance costs
- ▶ Heavy duty for use in commercial and residential areas
- ▶ Fast drying and curing
- ▶ Extremely durable surface
- ▶ Easy to apply, will not flake, fade or yellow over time

Before:

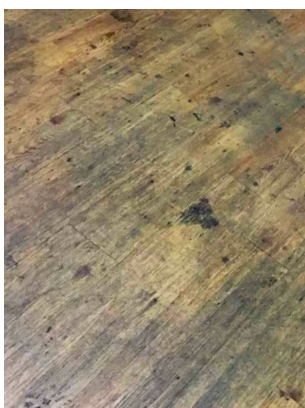

After:



## Product Properties / Benefits:

UZIN Turbo Protect Plus is a premium 2-component floor coating that is easy to apply. It has been formulated for residential and commercial applications.

## Technical Data:

Packaging:	comp. A: 4 litre plastic canister comp. B: 1 litre plastic bottle
Shelf life:	minimum 12 months
Colour:	milky when wet, clear when dry
Odour:	neutral
Coverage:	approx. 45 – 50 m <sup>2</sup>
Finish:	matt
Working temperature:	16 – 24 °C
Working time:	approx. 1 hour after Comp B is added*
Foot traffic:	8 – 12 hours*
Fully cured:	after approx. 7 days* (under optimal application conditions)

\*At 21 °C and 65 % relative humidity.  
Coverage is approximate and could vary depending on substrate.

UZIN | A brand of Uzin Utz Group

DE | Uzin Utz AG | Dieselstraße 3 | 89079 Ulm | Telefon +49 731 4097-0 | Telefax +49 731 4097-110 | E-Mail info@uzin.de | Internet www.uzin.com

GB | Uzin Utz UK Ltd. | Unit 2, Mitchell Court | Central Park, Rugby, CV23 0UY | Tel.: +44 1788 530 080 | Fax: +44 1788 536 508 | E-mail: uzin.uk@uzin-utz.com | Internet www.uzin.co.uk

FR | Uzin Utz France SAS | 6 avenue du Professeur André Lemierre | 75980 Paris Cedex 20 | Téléphone +33 141632720 | Téléfax +33 141632721 | E-mail uzin.fr@uzin-utz.com | Internet www.uzin.fr

## Substrate preparation:

- ▶ Before using read all instructions and product Safety Data Sheet (SDS) for both components.
- ▶ The floor must be structurally sound, solid, dry, clean and free of all contaminants such as grease, oil, paint and wax. If needed, use UZIN Basic Cleaner to remove contaminants.
- ▶ Use a wet cleaning machine to vacuum the water and residues after cleaning.
- ▶ Clean the floor 2 – 3 times with a microfiber mop and clear water.
- ▶ Surface must be dry before application.
- ▶ Protect all surfaces not to be coated with tape or other materials.

## Application:

- ▶ Before use, allow the contents of the containers to come to room temperature.
- ▶ Shake Component A vigorously for at least 2 minutes before adding Component B.
- ▶ Add Component B to Component A (1:4 mixing ratio) and shake immediately and vigorously for at least 2 more minutes.
- ▶ Let the product sit for 5 minutes (important to avoid air bubbles).

### **NOTE: Only use the UZIN Turbo Protect Roller for proper consumption.**

- ▶ Pour the mixed product directly onto the floor.
- ▶ Saturate the roller with UZIN Turbo Protect and begin application. Let the roller do the job (don't apply to much pressure).
- ▶ Beginning in one direction, apply the sealer with the UZIN Turbo Protect Roller. Cover every part of the floor with the coating. To finish roll over the coating again but at 90 degrees to the previous direction.
- ▶ Approx. 50 m<sup>2</sup> per canister. Applying the coating to thinly may result in an uneven sheen and streaking.
- ▶ Clean tools with water immediately after use. Dispose of the roller and use a new one with each job.

## Important notes:

- ▶ Storage: minimum 12 months when stored in original packaging at 23 °C. Protect from freezing. Tightly re-seal opened containers and use the contents as quickly as possible. Allow product to reach room temperature before use.
- ▶ The curing process takes approximately 7 days. Wait until fully cured before replacing rugs and mats. The floor may be walked on after 8 – 12 hours, but is susceptible to scuffing or marring prior to fully curing. Don't use a cleaning agent until fully cured (only use a dry dust mop if needed).

- ▶ Optimum working conditions are 20 – 25 °C room temperature, minimum floor temperature of 16 °C and relative humidity below 65 %. Low temperatures and high humidity extend, while high temperatures and low humidity shorten the working time.
- ▶ Glides/Protectors should be installed and maintained on all moveable chairs, tables, fixtures and other furniture to protect the coatings from unnecessary scratching.
- ▶ If a second coat is required, technical advice should be obtained.
- ▶ Certified for:
  - chemical resistant according to DIN 68861
  - suitable for toys EN 71-3
  - slip resistant DIN 51130
  - sports flooring DIN 18032

## Protection of the Workplace and the Environment:

Component A: Requires no special protection or precautions in general use. Component B: Contains isocyanates. Harmful on inhalation. Irritating to the respiratory system. May cause sensitisation by skin contact. Use barrier cream, protective gloves and safety-goggles. Provide good ventilation. After contact with skin, wash immediately with plenty of water and soap. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. Observe safety information on product label as well as safety data sheet. Once cured, has a neutral odour and presents no physiological or ecological risk.

## Disposal:

Where possible, collect product residues and re-use. Do not allow dispersal into drains, sewers or ground. Empty, drip-free plastic containers are recyclable. Containers with liquid residue, as well as the liquid product, are classed as Special Waste. Dried product residues are classed as Construction Waste.