

SAVE TIME WHATEVER THE CONDITIONS.

UZIN NC 110 NEW – longer open time, faster drying.



UZIN NC 110 NEW: longer open time, faster drying

The new improved premium gypsum levelling compound UZIN NC 110 NEW – now with the new Generation S Technology.

The classic gypsum levelling compound, UZIN NC 110, has now been improved with innovative raw materials and unique additives. This now exhibits numerous advantages.

UZIN NC 110 NEW is very low stress and therefore ideal for renovation work such as unstable old subfloors and surfaces with patches of different substrates. Due to its enhanced strength class the levelling compound now handles the installation of any type of floor covering with confidence.

Thanks to the reactive bonding agent combination and innovative additives the amount of mixing water bound by the levelling compound and not disseminated into the environment has increased. At the same time, the drying time is shortened by 4 hours.*


UZIN Generation S:

- **Secure:**
Even more secure installation results through increased water retention capacity.
- **Quick:**
The drying time is reduced by 4 hours.* This is possible thanks to the new type of reactive binding agent combination and an innovative additive.
- **Strong:**
Powerful surface strength and high strength development – because of the high-quality raw material composition.

More information at www.uzin.de/GenerationS

* at a thickness of 3 mm

WATER RETENTION CAPACITY UZIN NC 110 NEW

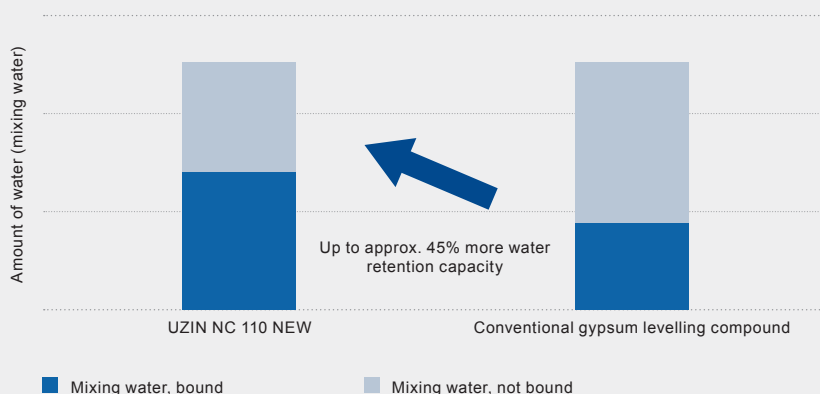

UZIN NC 110 NEW binds up to 45% more mixing water compared to a conventional gypsum levelling compound.



New innovative opening aid

Very smooth surface, time and cost savings as well as excellent installation results

High-strength C35 according to EN 13813

Faster drying

Superior flow characteristics

Premium-Gips-Ausgleichmasse
 Selbstverlaufende, extrem glatte Spachtel- und Ausgleichmasse auf Calciumsulfatbasis mit Level Plus Effect S für Schichtdicken bis 50 mm

- Ⓞ Gypsum-based Levelling Compound
- Ⓜ Masse d'égalisation base plâtre
- Ⓜ Autolivellante in solfato di calcio
- Ⓜ Masa de compensación de yeso
- Ⓜ Gipsregalisatie
- Ⓜ Gipsbaseret avretningsmasse
- Ⓜ Gipsbaserad avjämningssmasa
- Ⓜ Gipspartelmasse
- Ⓜ Kipsipohjainen tasoitemas

CE	
0791	
Uzin Uzin AG	
Dankstraße 3	
CH-8007 St. Gallen	
13	
010510020102	
EN 13 813:2002	
Calcium sulphate levelling compound for substrates in interior locations	
EN 13 813: CA-C35-F7	
Reaction to fire	A 1 R
Release of volatile substances	CA
pH	> 7
Compressive strength	C 35
Flexural strength	F 7



ÖKOLINE



